Tank Monitor Accessories

007 SV Solenoid Valve

Low voltage solenoid valve . For use with the 007 tank monitor. Shuts off air to pump when 007 is in alarm condition. Can be located up to 350' away from 007. Wall mount transformer included.

12V DC	1/2" NPT Ports	10-200 PSI

007 SVT Solenoid Valve with Timer

Same as 007SV with added timer.
SAVE TIME AND MONEY! Shuts off pump saving labor time and equipment failure due to unattended pump station. Simply turn knob to desired time (3-15 min.) and get back to the job. The timer will take care of the rest.

Heavy Duty 007 Power Relay

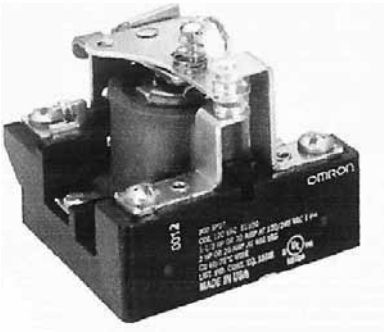

SPDT [N/O or N/C] dry contacts for a variety of applications, i.e. drive electric pumps, turn lights on/off, etc.

Contact Rating - 30 amp or 1 1/2" HP at 120 or 240 VAC. UL recognized.

DPDT available.