


Pneumatic tank contents gauges and level indicators

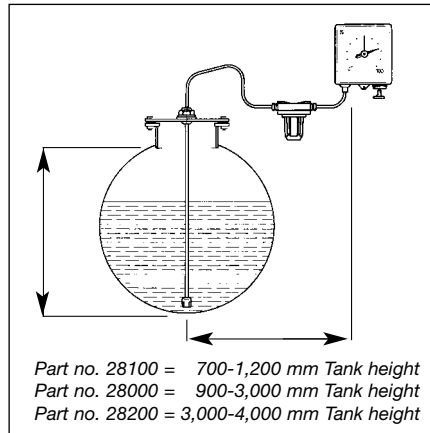

Unitop 3000

Universal, pneumatic tank contents gauge featuring capsule type movement for remote indication up to 50 m. Accuracy of measurement $\pm 2\%$ FSD. Zero correction and overpressure protection device. Fully adjustable for tank heights between 900 and 3,000 mm at a density of 0.84 g/cm^3 (fuel oil and diesel). Reference pointer and date indicator for easy consumption control. Impact resistant plastic housing for wall mounting. Indication in percentage of liquid level. Universal connection for capillary tube with an outside diam. of 6 mm (also refer to pages 15, 104 for Pneumofix and Euroflex). 6 separate litre scales are included for cylindrical, horizontal tanks. (3,000/5,000/7,000/10,000/16,000/20,000 l). Any other scale can be supplied.

Unitop 1200

Similar to Unitop 3000, but fully adjustable for tank height H from 700 to 1,200 mm.

Unitop 4000

Similar to Unitop 3000, but fully adjustable for tank height H from 3,000 to 4,000 mm.

Unitop 2500 for water

Similar to Unitop 3000, but works pre-set for liquids with a density of 1 g/cm^3 (water). The symbol shown below is printed on the dial for easy identification.



Additional slide-in scales in litres

Additional slide-in scales in litres for Unitop 3000, Unitop 1200, Unitop 4000 and Unimat. Suitable for all horizontally installed cylindrical tanks. When ordering, please specify the shape and capacity of tank.

Special slide-in scales

For tanks of any shape and dimensions, suitable for Unitop 3000, Unitop 1200, Unitop 4000 and Unimat. Scales are individually calibrated to customer's specification. When ordering, please enclose a sketch of the tank or a dip chart with exact details of tank shape, size and capacity.

Excellence in Level Measurement

PacificGauge
The Level People