

HUSKY V34i NOZZLE

AUTOMATIC SHUT OFF VACUUM ASSIST NOZZLE

Vacuum Assist Nozzle for self service, full service and unattended stations.

- V34i nozzle shuts off when the gas tank is full.
- Strong vapor valve in the nozzle that is mechanically operated by the on-off action of the nozzle's lever.
- Nozzle is equipped with a unique Flo-Stop™ device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- *Stream Shaper™* reduces turbulence for straighter flow and less splash back spillage.
- Husky vapor return line is an internal part of the body casting, thus eliminating potential vapor leak points and fugitive evaporative emissions from the fuel remaining in the vapor path of the hose.
- Uses conventional spout without spout ring and aluminum vapor escape guard.
- Vapor assist is achieved at the body end of the spout where a vapor ring captures emissions.
- Nozzle spout is covered by a one year warranty.



SPECIFYING INFORMATION

Model Number	Description	Shipping Weight <small>lbs (kg)</small>
6670041	New, Unleaded Nozzle with Two Notch Hold Open Clip	4.0 (1.8)
6670041A	New, Unleaded Nozzle with Two Notch Hold Open Clip - Atex	4.0 (1.8)

CONSTRUCTION

Body	Die cast aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon
Lever	One piece contoured steel with hard plastic cover
Inlet	M34 x 1.5



PATENTS and LISTINGS

Patent Numbers: 5,394,909

Listings:   pending




MADE IN THE U.S.A.



HUSKY V34i NOZZLE

AUTOMATIC SHUT OFF VACUUM ASSIST NOZZLE

- **Dimensions**
- **Accessories**

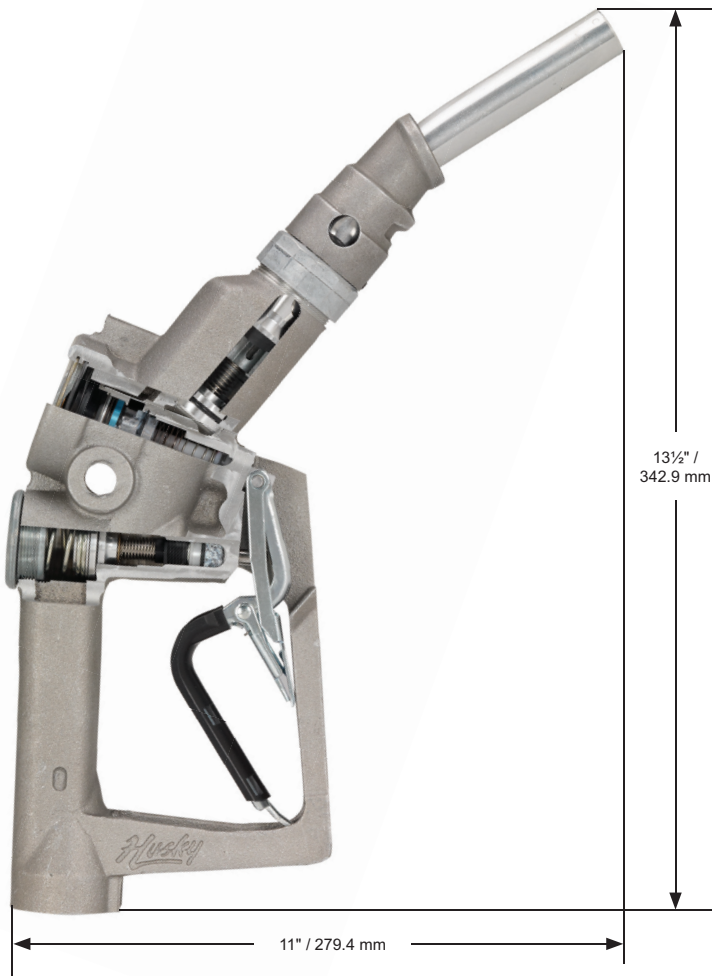

Safe-T-Breaks®

Model No.	Description
4034	Reconnectable Safe-T-Break®
4034A	Reconnectable Safe-T-Break® - Atex
6210	Non-Reconnectable Safe-T-Break®
5134A	Non-Reconnectable Safe-T-Break® - Atex

Swivel

Model No.	Description
4605	Inverted Vapor Assist Swivel

Pressure / Vacuum Vents

Model No.	Description
4620	2" Slip-On Pressure Vacuum Vent
4885	2" Thread-On Pressure Vacuum Vent - NPTF
5885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPTF
8060	2" Thread-On Pressure Vacuum Vent - 3" / 8"
7525	2" Thread-On Pressure Vacuum Vent - BSPT
7457	2" Thread-On Pressure Vacuum Vent with Internal Screen - BSPT
5041	3" Thread to 2" Thread Pipe Adaptor - NPTF
5426	Pressure Vacuum Vent Test Adaptor

Guards

Model No.	Description
6951	Full Grip Guard
6660	POPD™ Full Grip Guard
4231	Full Grip Reguard
7220	POPD™ Full Grip Reguard
6628	POPD™ Clear Cover
5494	Lever Guard

Flo-Equalizers™

Model No.	Description
5837	Vapor Assist Flo-Equalizer™

Testing and Maintenance Equipment

Model No.	Description
7089	Nozzle Service Kit
3593	Hold Open Clip Kit
0397	Unleaded Spout Gauge
5233	O-ring Kit

