

# HUSKY XS® E85 NOZZLE

## E85 PRESSURE ACTIVATED AUTOMATIC NOZZLE

Pressure activated, automatic shut off nozzle for self-service, full service and unattended stations.

- Aluminum body, spout, and internal parts are nickel plated to prevent contamination and corrosion from Ethanol blends.
- Compatible with unleaded and all Ethanol blends through E100.
- Aluminum reinforced spout bushing keeps the spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- StreamShaper™* reduces turbulence for straighter fuel flow and less splash back spillage.

- Husky XS® E85 nozzle shuts off
  - when the pump shuts off.
  - when the gas tank is full.
  - when the lever is opened before the pump is turned on.
  - when the leak detector has not completed its test cycle.
- Nozzle is equipped with a unique Flo-Stop™ device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Nozzle comes with smooth Full Grip Guard.



Shown w/ optional waffle guard

### SPECIFYING INFORMATION


Model Number	Description	Shipping Weight lbs (kg)
659504	New, Unleaded with Three Notch Hold Open Clip	3.0 (1.3)
659559	New, Unleaded with Three Notch Hold Open Clip and Waffle Splash Guard	2.9 (1.3)
659544	New, Unleaded with Three Notch Hold Open Clip, Waffle Splash Guard & Flo-Equalizer™	3.0 (1.3)
659554	New, Unleaded with Three Notch Hold Open Clip and Flo-Equalizer™	2.9 (1.3)
659589	New, Unleaded with Three Notch Hold Open Clip, POPD™ Full Grip Guard and Waffle Splash Guard	3.0 (1.3)
6595100	New, Unleaded with Three Notch Hold Open Clip, POPD™ Full Grip Guard, Waffle Splash Guard and Sightglass	3.0 (1.3)

### CONSTRUCTION

Body	One piece die cast aluminum with Electroless Nickel Plating
Disc	Fluorocarbon
Packing	Double O-ring seal protected by fiber reinforced Teflon
Lever	One piece contoured steel with hard plastic cover.
Inlet	3/4" / 19 mm NPTF

### PATENTS and LISTINGS

Listings:  pending

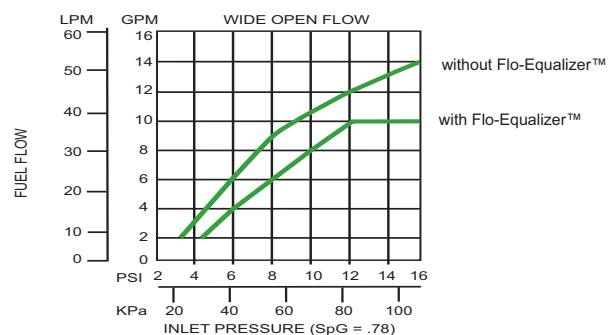

CONVENTIONAL FUELING

# HUSKY XS® E85 NOZZLE

## E85 PRESSURE ACTIVATED AUTOMATIC NOZZLE

- **Dimensions**
- **Accessories**

### Safe-T-Breaks®

Model No.	Description
6360	¾" F x ¾" F Reconnectable E85 Safe-T-Break®
6273	¾" F x ¾" F Non-Reconnectable E85 Safe-T-Break®

### Swivel

Model No.	Description
6350	¾" M x ¾" F Multi-plane E85 Swivel

### Pressure / Vacuum Vents

Model No.	Description
4620	2" Slip-On Pressure Vacuum Vent
4885	2" Thread-On Pressure Vacuum Vent
5885	2" Thread-On Pressure Vacuum Vent with internal screen
5041	3" Thread to 2" Thread Pipe Adaptor
5426	Pressure Vacuum Vent Test Adaptor

### Spouts

Model No.	Description
6207	Unleaded E85 Spout w/o Flo-Stop™

### Guards

Model No.	Description
4145	Full Grip Guard
6665	POPD™ Full Grip Guard
1806	Full Grip Reguard
7205	POPD™ Full Grip Reguard
3795	Mate Guard
7815	POPD™ Mate Guard
1808	Waffle Splash Guard
1506	Protection Package
1809	Reguard Protection Package
3440	Mate Easy-on Package
6628	POPD™ Clear Cover
5494	Lever Guard
3376	Black Handle Guard

### Flo-Equalizers™

Model No.	Description
7490	Internal Flo-Equalizer™ - 10 gpm / 37.9 Lpm

### Testing and Maintenance Equipment

Model No.	Description
7089	Nozzle Service Kit
3593	Hold Open Clip Kit
0397	Unleaded Spout Gauge

