



**SPECIFICATION FOR FLEET PUMPS AND DISPENSERS**

FLEET FEATURES	OPTIONS
<ul style="list-style-type: none"> <li>Meters, proven accuracy and calibration stability</li> <li>Easy Reach hose suspension with excellent hose reach</li> <li>Husky Nozzles with grade colour coding on nozzle</li> <li>Large, unobscured panels for clear corporate branding</li> <li>Nozzle boots anti-kink sleeves and splash guards as standard</li> </ul>	<ul style="list-style-type: none"> <li>Easily serviced spin-on type filters for cleaner fuel with dispensers</li> <li>Husky splash guard on diesel</li> <li>High Speed option – 25 mm hose and nozzle</li> </ul>

GENERAL SPECIFICATIONS
Hose Configuration = 1-2 products
Display Litres only = Six Digits (9990.00)
Pumping Configuration = 1-2 products
Dispenser Configuration = 1-2 products
FlowRate:
S = Standard (50 lpm) -
H = High (100 lpm) -

HYDRAULICS		
Suction Head	Pumps Only	4.0 m l @ 250C @ sea-level)
Metering	MP-02515-G Flowmeter	Better than 0.05%
Air Separation	PGS-0257-L Pumping Unit	Better than 99.95%
ELECTRONICS		
Unsafe components housed in Exd Junction boxes –		
Displays	Transflective, backlit LCDs	
ELECTRICAL SYSTEMS		
Motor	750 w	750 w Exd and IEC certified motor
MECHANICAL SYSTEMS		
Nozzle	Husky Nozzle	20 mm Automatic Nozzle

Length - 550  
 Depth - 400  
 Height - 1200

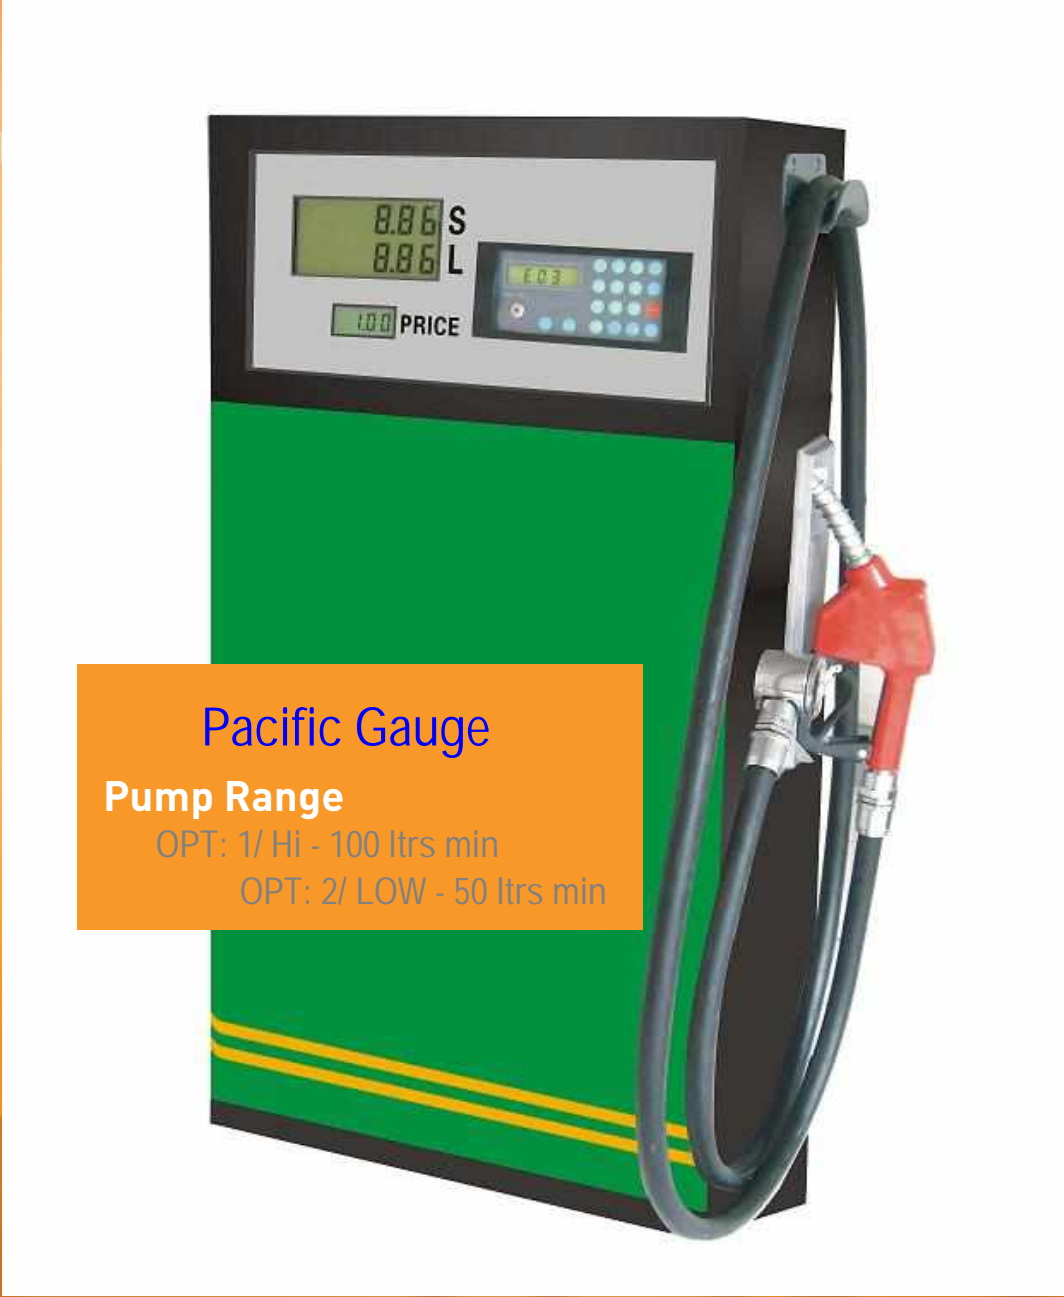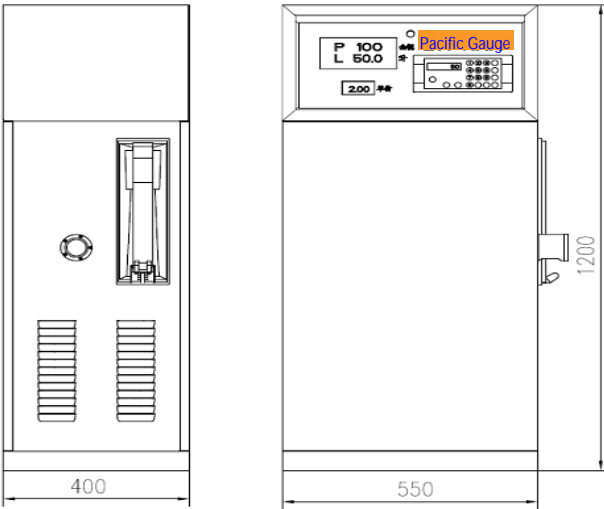

**Pacific Gauge**  
**Pump Range**  
 OPT: 1/ Hi - 100 ltrs min  
 OPT: 2/ LOW - 50 ltrs min

Pacific Gauge



Pump Range

