


# Pneumatic tank contents gauges and level indicators



## Unitop 3000

Universal, pneumatic tank contents gauge featuring capsule type movement for remote indication up to 50m. Accuracy for measurement  $\pm 2\%$  FSD. Zero correction and overpressure protection device. Fully adjustable for tank heights between 900 and 3,000 mm at a density of  $0.84 \text{ g/cm}^3$  (fuel oil and diesel). Reference pointer and date indicator for easy consumption control. Impact resistant plastic housing for wall mounting. Indication in percentage of liquid level. Universal connection for capillary tube with an outside diameter of 6mm (also refer to pages 15, 104 for Pneumofix and Euroflex).

- High accuracy
- Unique movement suspension separated from housing
- Overpressure device
- Consumption control with date indication

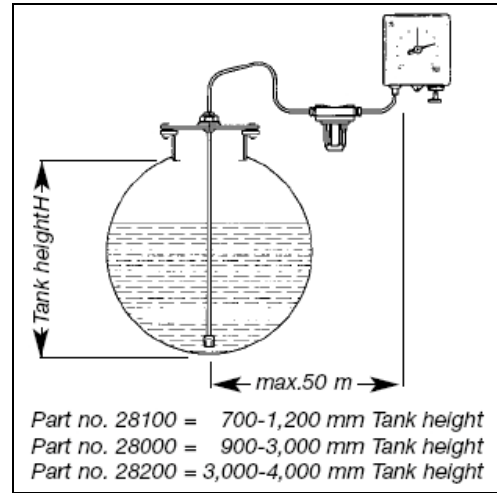

## Unitop 1200

Similar to Unitop 3000, but fully adjustable for tank height H from 700 to 1,200mm.

## Unitop 4000

Similar to Unitop 3000, but fully adjustable for tank height H from 3,000 to 4,000mm.

## Unitop 2500 for water

Similar to Unitop 3000, but works pre-set for liquids with a density of  $1 \text{ g/cm}^3$  (water). The symbol shown below is printed on the dial for easy identification.



DG: G	PU	Part No.	Price
Unitop 3000	10	28000	
Unitop 1200	1	28100	
Unitop 4000	1	28200	
Unitop 2500 for water	1	28002	